

REPLACEMENT SHEET



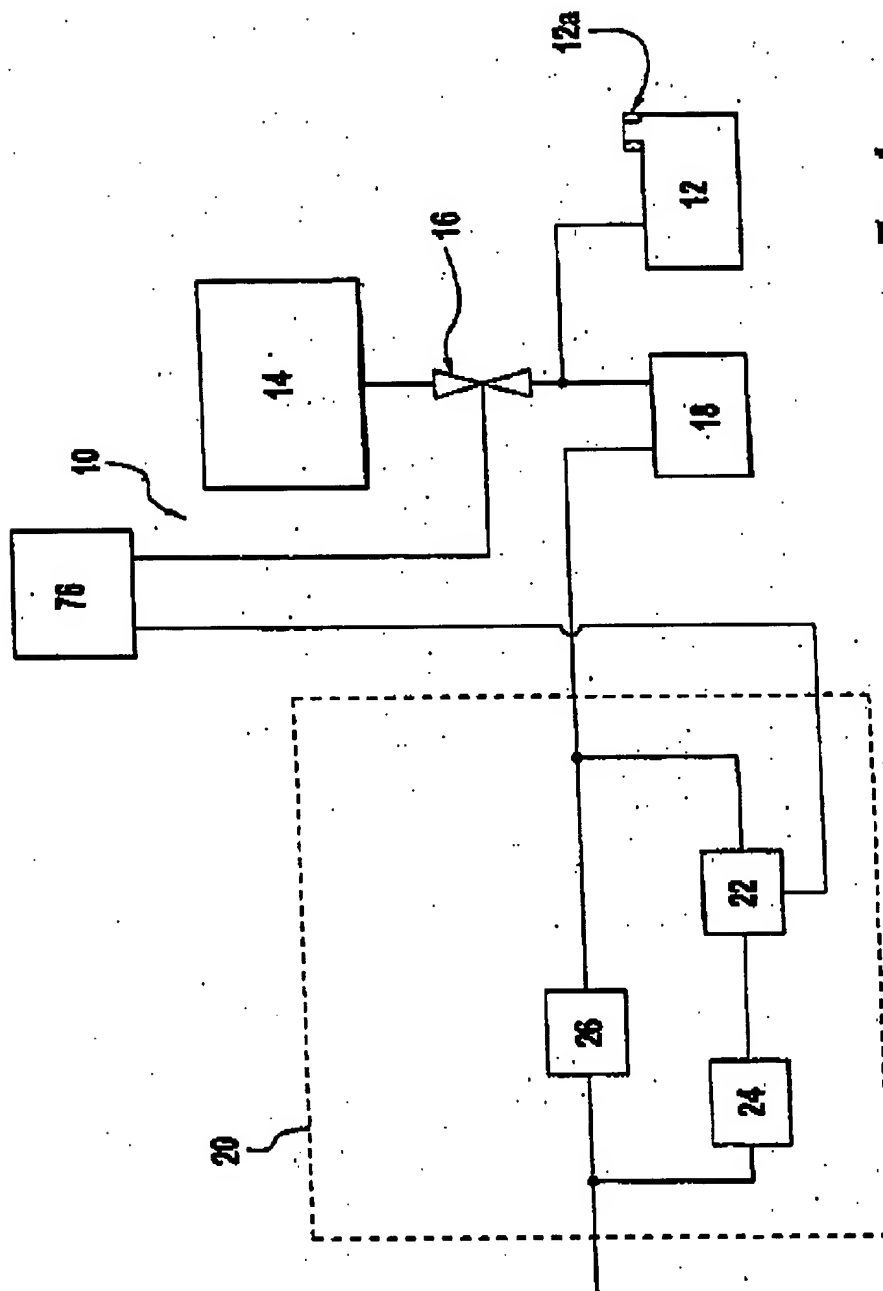


FIG. 1


REPLACEMENT SHEET

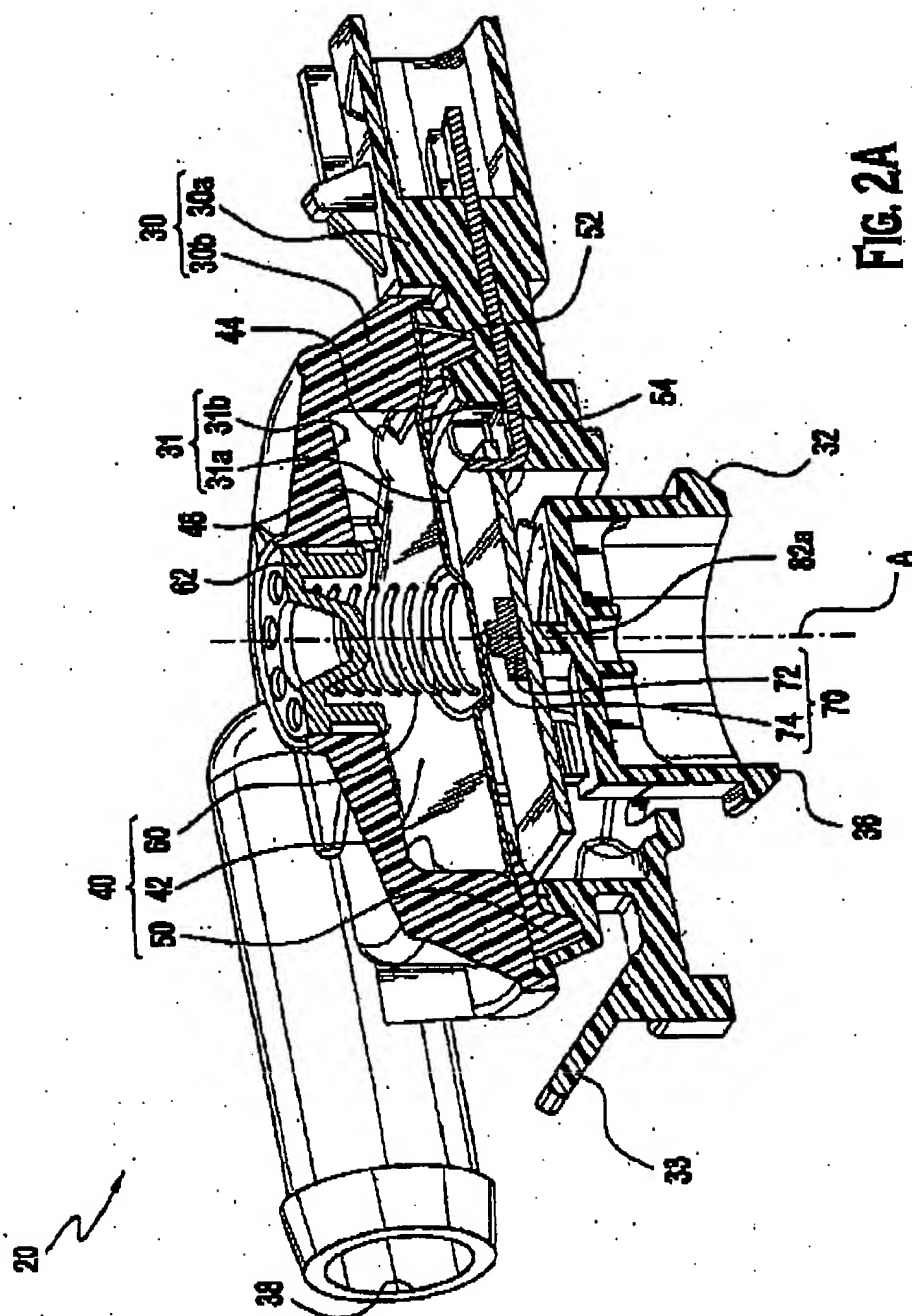

REPLACEMENT SHEET

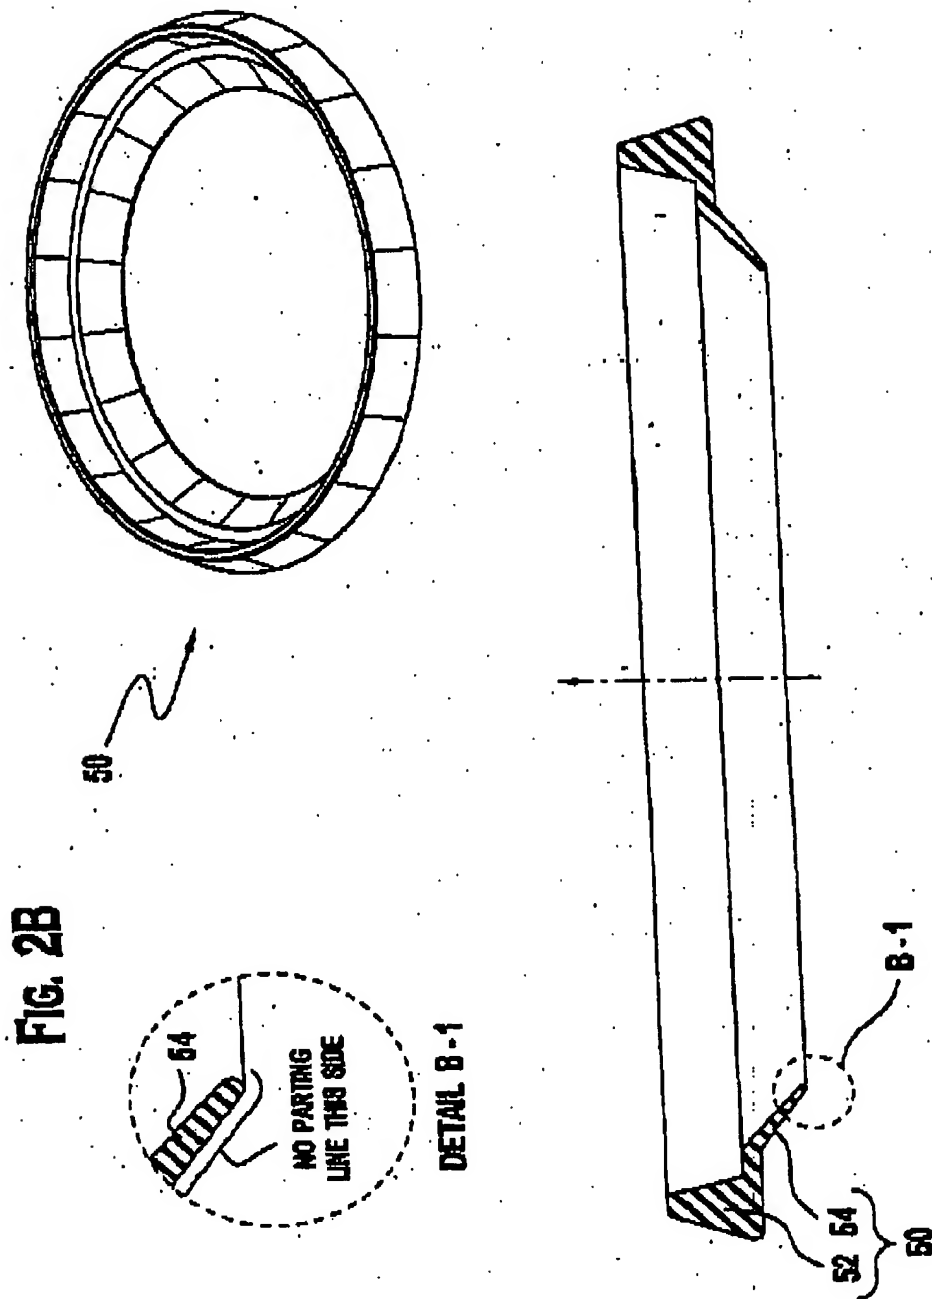

REPLACEMENT SHEET

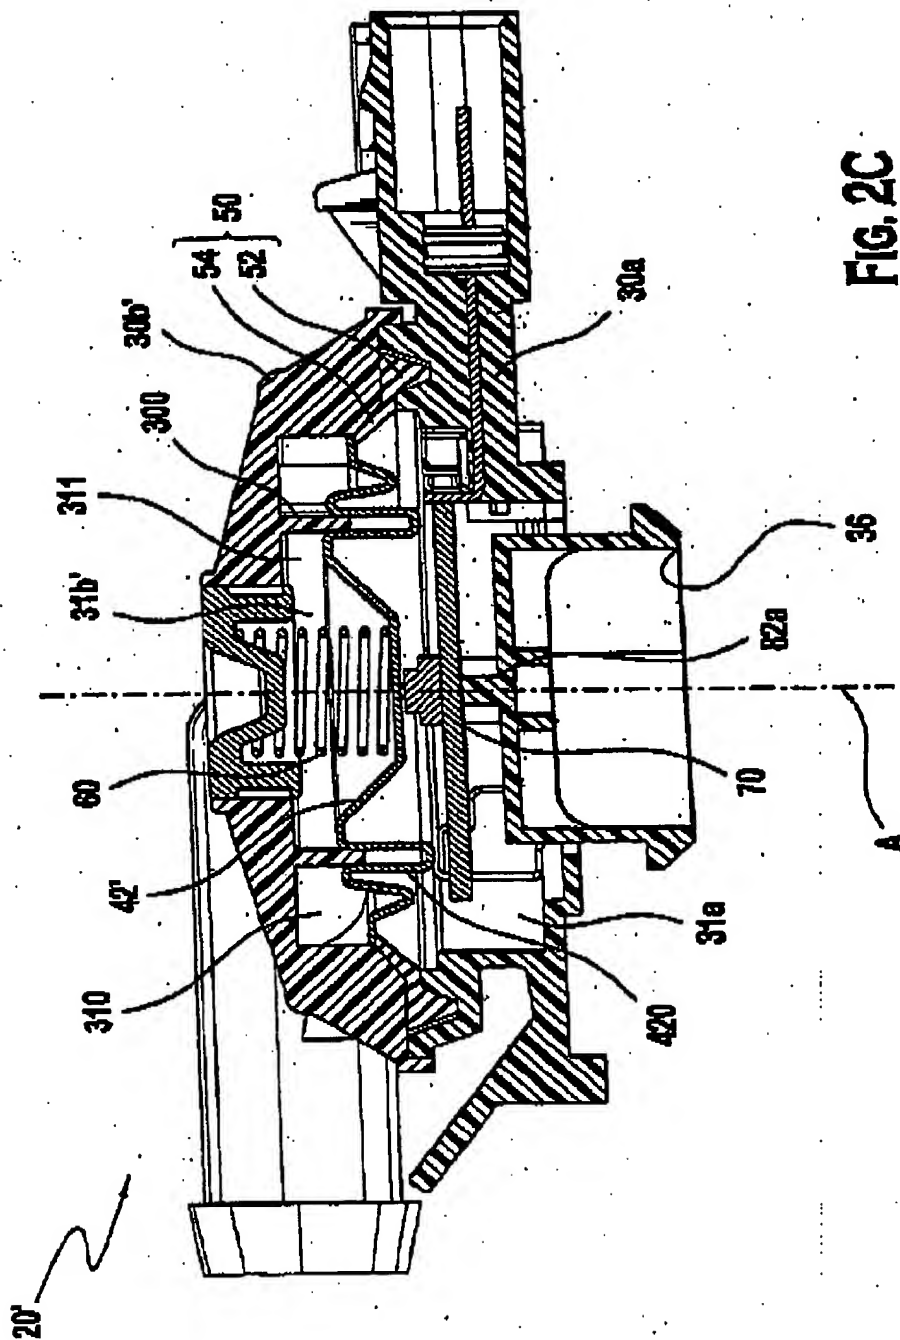

REPLACEMENT SHEET

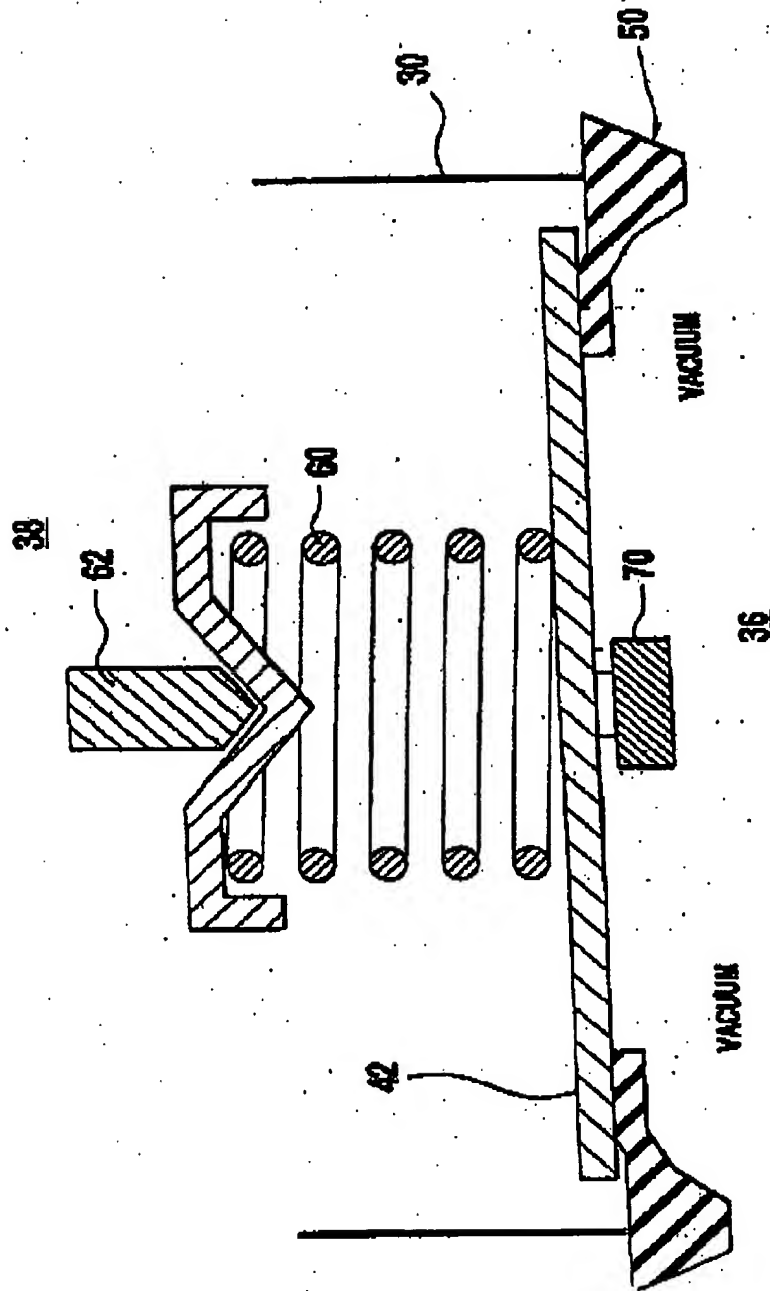


FIG. 3A

REPLACEMENT SHEET

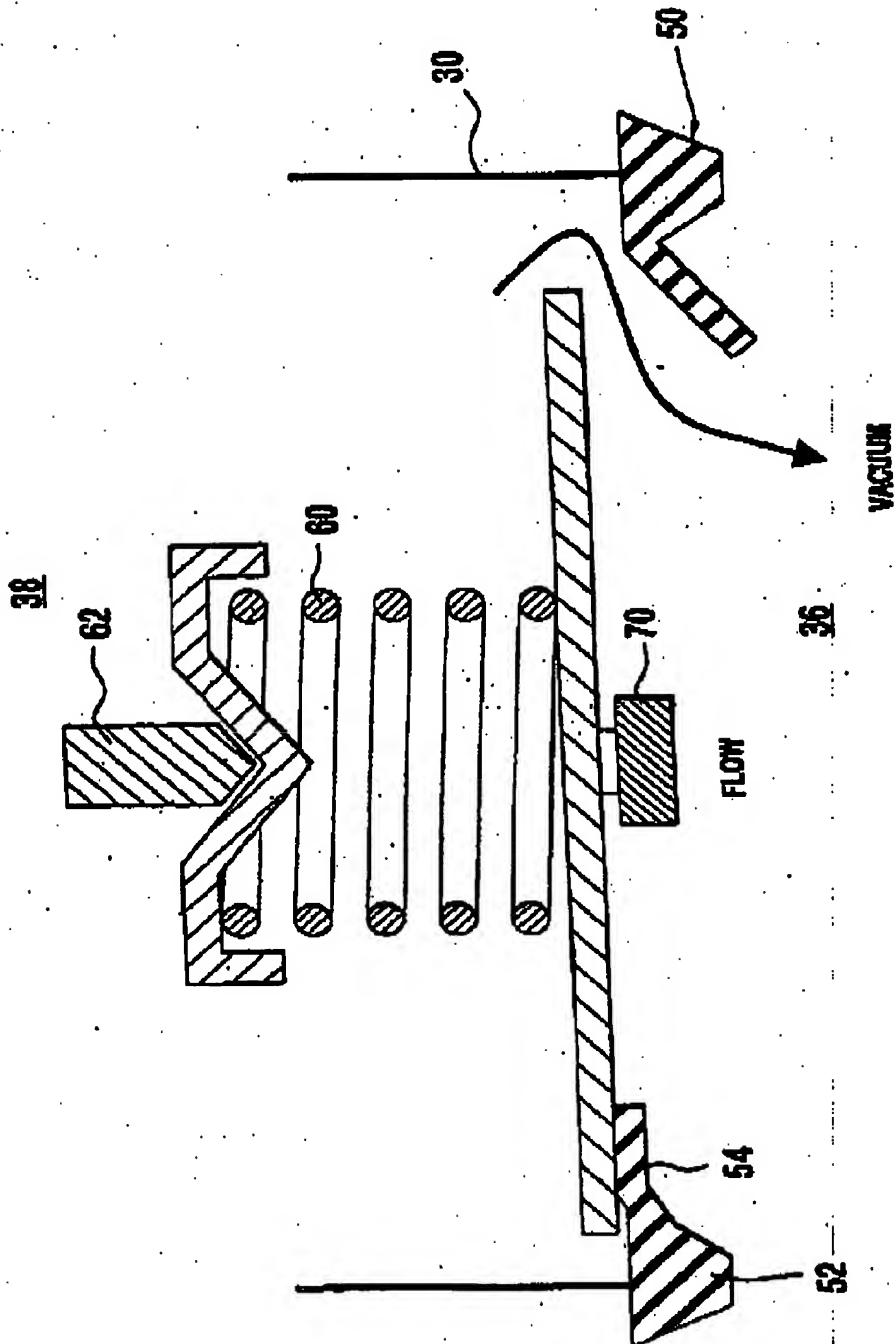


FIG. 3B

REPLACEMENT SHEET

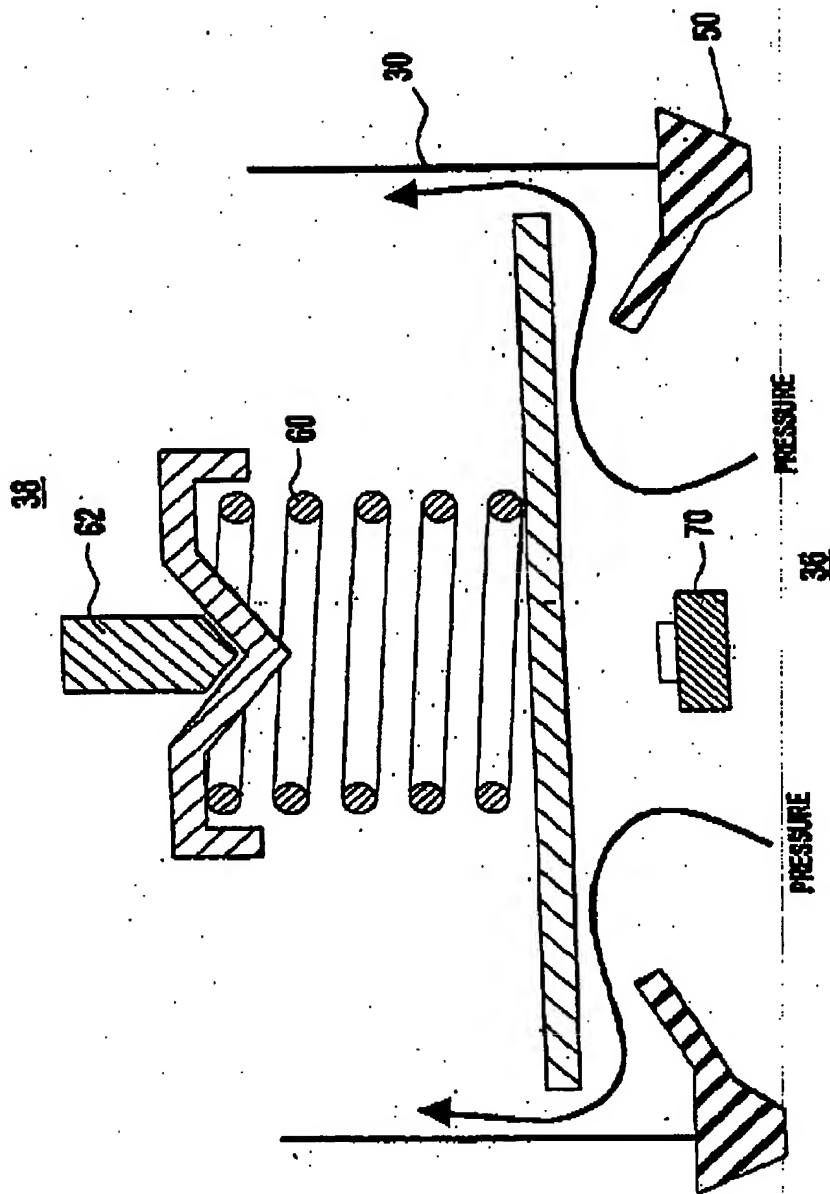


FIG. 3C

REPLACEMENT SHEET

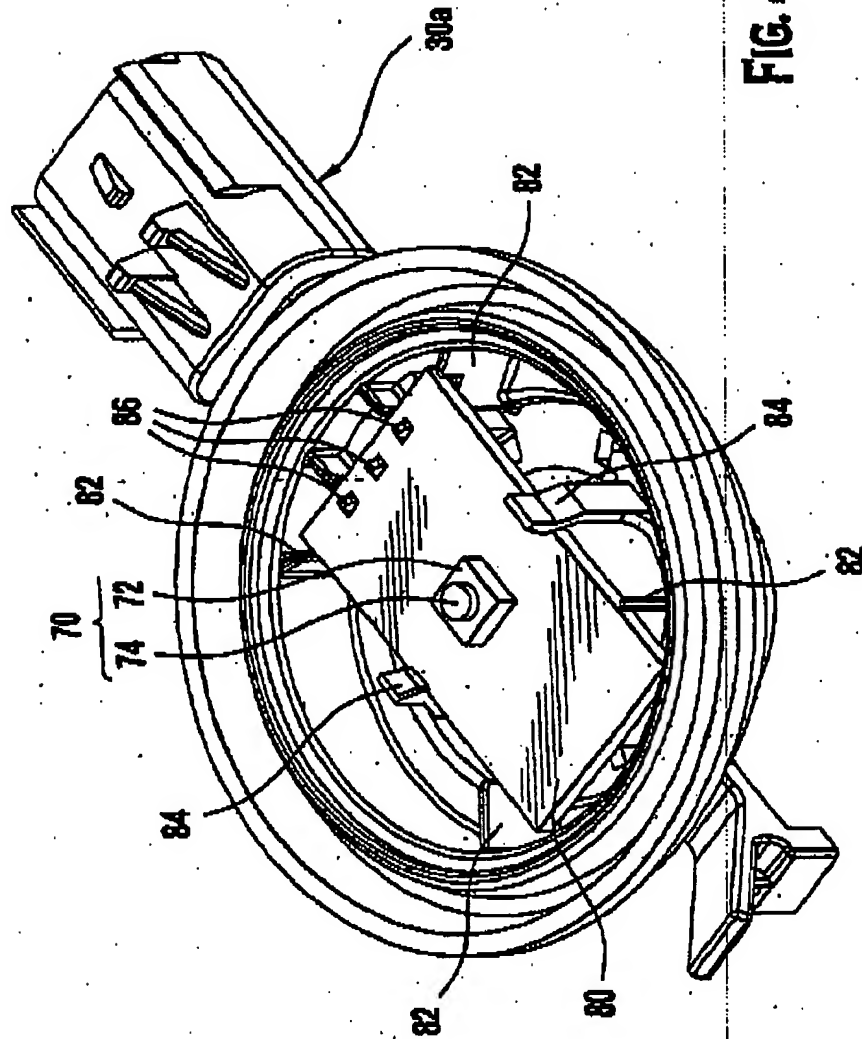


FIG. 4

REPLACEMENT SHEET

FIG. 5A

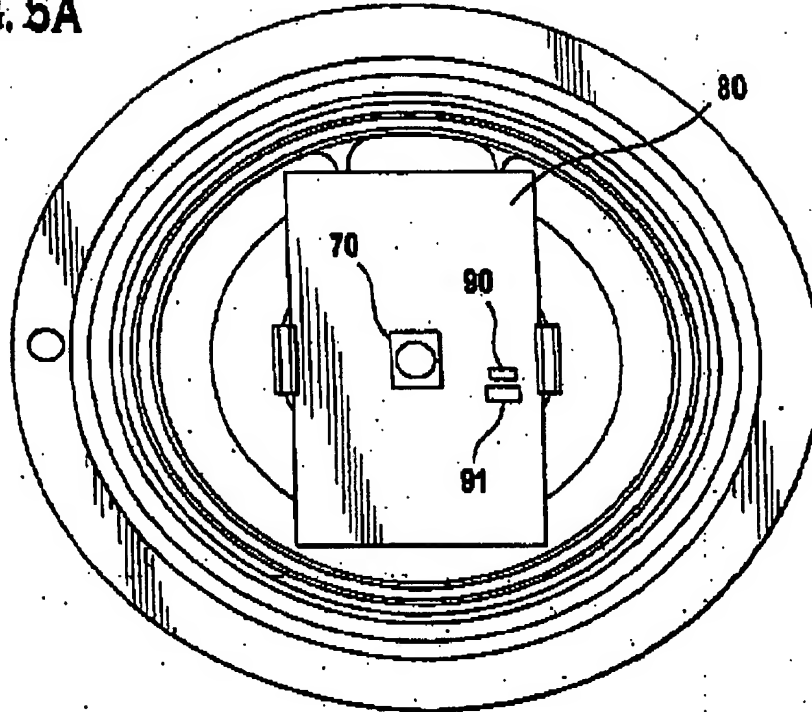


FIG. 5B

STEP CHANGE IN FLOW: 0-80 SLPM
AMBIENT TEMPERATURE: 20 DEGREES C
HEATING RESISTOR: 100% PWM

